

MCK001 / MCK002

Modular connection kit

- Low profile for under insulation mounting.
- Plastic designed in-line connectors.
- Resistant to temperatures between -40°C and 105°C.
- Rated to 450 volts.

DESCRIPTION

Our MCK001 and MCK002 is an easy-to-use, low-cost and high quality universal connection kit used in freeze protection or low temperature maintenance applications.

The MCK001 allows direct connection, without the need for power boxes, between the heating cable and the power cable or the in-line splice between two heating cables. This allows skids or portable items to be disconnected and reconnected with ease.


The MCK002 provides a 'T' branch between three heating cables and due to its small size, it can be placed under the insulation.

MCK001


- A modular plastic connector designed for power connection or a splice.
- Quickly connect and release the joint.
- An extra flat seal is provided to convert it to an in-line splice.
- IP66 & 50A rated
- Cable conductors between 0.5 - 6.0 mm²
- Removable IP66 dust/water caps to protect unconnected joints.
- Internal copper alloy screw terminals.

MCK002


- Plastic connector for the connection of three heater cables forming a tee-joint.
- IP68 & 24A rated
- Cable conductors between 0.5 - 2.5 mm².
- Internal clamp style connectors.

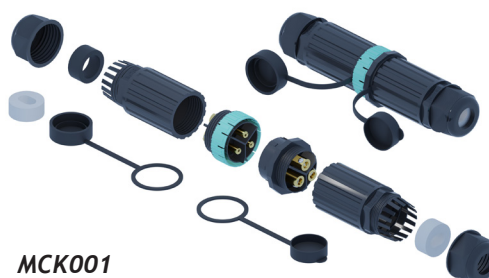


MCK001

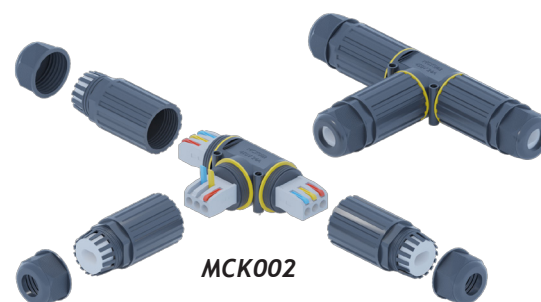

MCK002

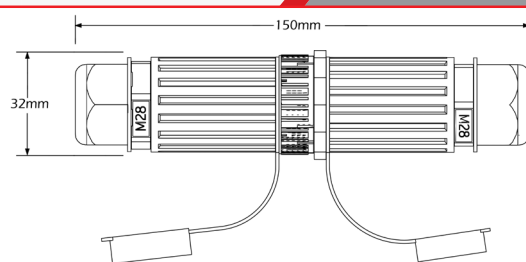

MCK001

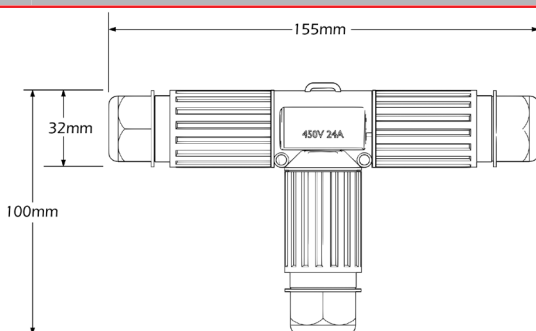

MCK002



The Heat Tracing Authority™