



Commercial Junction Box with Knock outs

Heat Trace provide commercial junction boxes that are suitable for Non-Hazardous loactions. These boxes are manufactured from Polycarbonate and can be installed even under harsh ambient conditions. These boxes may be used for direct termination of power cables and electrical heat tracing cables. A maximum of 3 heat tracing cables can be connected to a single junction box.

RATINGS/SPECIFICATIONS

Dimensions: 102 x 100 x 60mm

IP67 Ingress Protection:

Non-Hazardous (indoor and outdoor) Area of use:

7 x M20 / M25 **Knock outs:**

Base: **Grey Polycarbonate**

Lid: **Grey Polycarbonate**

Impact resistance: **IK 10**

-40°C to 85°C Ambient temperature range:

250V AC maximum Voltage:

0 - 4mm² Max. conductor size:

Current rating: 32A

Weight: 400g approx.


















Features


- Compact Size
- Clip On terminals
- Control cable connection up to 4mm²
- Knock outs on each side of junction box
- CE marked



FRONT VIEW WITHOUT LID



BOTTOM VIEW

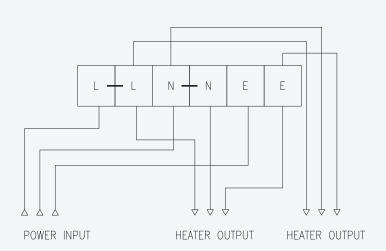



Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.

Tel: +44 (0)1928 726451

www.heat-trace.com Email: info@heat-trace.com