MCK001 / MCK002 / MCK003

Modular connection kits

- Low profile for under insulation mounting.
- Resistant to temperatures between -40°C and 105°C.
- Plastic designed in-line connectors.
- Rated to 450 volts.


DESCRIPTION

Our MCK001, MCK002 and MCK003 are easy-to-use, low-cost and high quality universal connection kits used in freeze protection or low temperature maintenance applications.

The MCK001 allows direct connection, without the need for power boxes, between the heating cable and the power cable or the in-line splice between two heating cables. This allows skids or portable items to be disconnected and reconnected with ease.

The MCK002 provides a 'T' branch between three heating cables and due to it's small size, it can be placed under the insulation.

The MCK003 provides a fast power connection kit with $2 \times dust caps$.

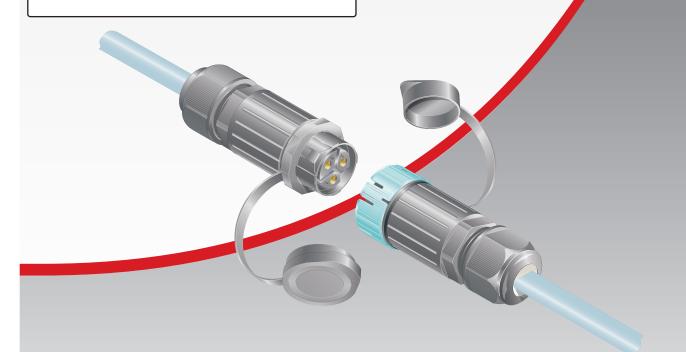



The Heat Tracing Authority

0535 (05062025) Issue 2

SPECIFICATION

MCK001

A modular plastic connector designed for power connection or a splice.

Quickly connect and release the joint.

NOTE: an additional flat seal (MCKS001) is required to convert it to an in-line splice.

IP66 & 50A rated.

Cable conductors between 0.5 - 6.0 mm².

Removable IP66 dust/water caps to protect unconnected joints.

Internal copper alloy screw terminals.



Plastic connector for the connection of three heater cables forming a tee-joint.

IP68 & 24A rated

Cable conductors between 0.5 - 2.5 mm².

Internal clamp style connectors.

MCK003

A modular plastic connector designed for power connection or a splice.

Fast power connection kit with 2 x dust caps.

MCKS001


Flat slotted profile seal required for when connecting our Heating Cables.
















Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England. Tel: +44 (0)1928 726451

www.heat-trace.com

Email: info@heat-trace.com