

Electrical heating cable for freeze protection or temperature maintenance.

## **FREEZSTOP MICRO**

*Self-Regulating Heating Cable*

- Automatically adjusts heat output in response to increasing or decreasing pipe temperature.
- Can be cut-to-length.
- Inherently temperature safe.

- Suitable for use in safe, hazardous and corrosive areas.
- Available up to 277V AC/DC.
- Full range of controls and accessories available.

### **DESCRIPTION**

FREEZSTOP MICRO is an industrial grade self-regulating heating cable that can be used for freeze protection or temperature maintenance of pipework and vessels.


It is particularly suited to small diameter pipes and instrument tubing such as impulse or analyser lines.

It can be cut-to-length at site and exact piping lengths can be matched without any complicated design considerations.

FREEZSTOP MICRO is approved for use in non-hazardous and hazardous areas to world wide standards.

Its self-regulating characteristics improve safety and reliability. FREEZSTOP MICRO will not overheat or burnout, even when overlapped upon itself. Its power output is self-regulated in response to the pipe temperature.

The installation of FREEZSTOP MICRO is quick and simple and requires no special skills or tools. Termination, splicing and power connection components are all provided in convenient kits.

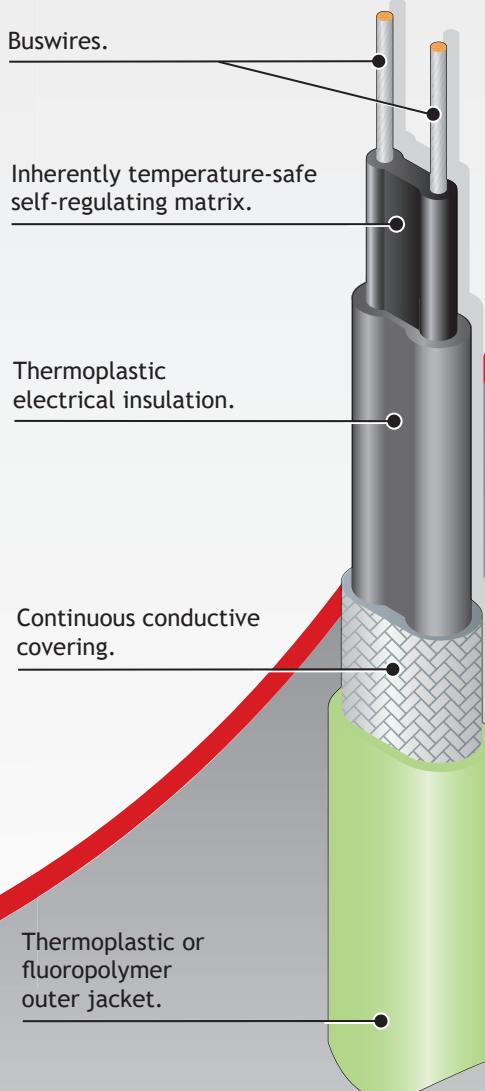

*FSM-CF is supplied with a black fluoropolymer outer-jacket.*



*The* **Heat Tracing Authority™**

## SPECIFICATION

### MAXIMUM CONTINUOUS EXPOSURE

TEMPERATURE (Power ON): 65°C<sub>T</sub> (149°F)

### MAXIMUM PERMISSABLE EXPOSURE

TEMPERATURE (Power OFF): 85°C<sub>T</sub> (185°F)

### MINIMUM OPERATING

TEMPERATURE: -40°C (-40°F)

### MINIMUM INSTALLATION

TEMPERATURE: -40°C (-40°F)

### POWER SUPPLY:

12 - 277V AC/DC

### TEMPERATURE CLASSIFICATION:

T6 (85°C)

### INGRESS PROTECTION:

IP67

### WEIGHTS & DIMENSIONS:

Type	Dimensions	Weight	Min Bending	Gland	
Ref	(mm)	+/- 0.5	kg/100m	radius	Size
FSM-C	9.3 x 4.7	7.4	30mm		M20
FSM-CT	10.5 x 5.9	9.3	35mm		M20
FSM-CF	10.2 x 5.6	10.2	35mm		M20

### APPROVAL DETAILS:

ATEX <sub>T</sub>	- CML 19ATEX3381
IECEx <sub>T</sub>	- CML 19.0124
CSA	- 1295278, 1547590
UKEX	- CML 21UKEX31137

### ORDERING INFORMATION:

Example:

17 FSM 2 - C T

Output 17W/m at 5°C

FREEZSTOP MICRO

Supply Voltage 220 - 277V AC/DC

Metal Braid

Thermoplastic Outerjacket

### ACCESSORIES:

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls. Such items carry separate approvals from the heating cables. Use only approved components, as per system certification.

### ATEX, IECEx & UKEX MARKINGS:



Ex 60079-30-1 IIC T6 Gb

Ex 60079-30-1 IIIC T85°C Db

EN 60079-0:2018

EN 60079-30-1:2017

### MAXIMUM LENGTH (m) vs. CIRCUIT BREAKER SIZE:


The following circuit details relate specifically to the trace heating of pipework and equipment. For any other application consult Heat Trace.

Cat. Reference	Start-up Temperature	230V			
		6A	10A	16A	20A
11FSM	5°C	76	126	128	-
	0°C	70	118	128	-
	-20°C	46	78	124	128
	-40°C	36	60	96	120
17FSM	5°C	54	88	102	-
	0°C	50	84	102	-
	-20°C	34	56	88	102
	-40°C	26	42	68	86
Residential buildings	Commercial buildings	Industry and Infrastructure			
MCB's certified IEC 60898-1	MCB's certified according both IEC 60898-1 & IEC 60947-2				

### THERMAL RATINGS:

Nominal output at 230V when FSM is installed on insulated metallic pipes and as outlined in the procedures within IEC62395 and IEC60079-30.

Note: Please refer to Evolution for more precise power output values as a function of pipe temperature.

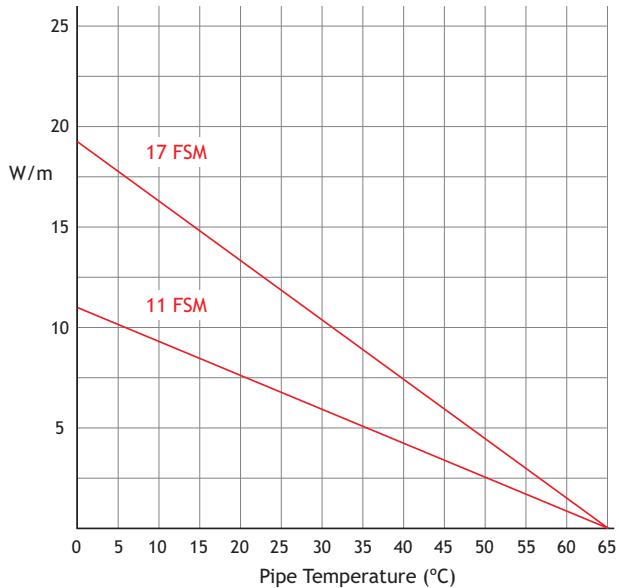

### FURTHER INFORMATION:

Please consult the appropriate termination instructions and the Heat Trace Design, Installation, & Maintenance Manual (HTDIMM 010) for further details.



Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.

Tel: +44 (0)1928 726451

[www.heat-trace.com](http://www.heat-trace.com)

Email: [info@heat-trace.com](mailto:info@heat-trace.com)

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only. Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.