

Heat Tracing Junction Box with Electronic Thermostat

(R160/JBETH/1W/6/25A)

Junction Box complete with Electronic Thermostat for temperature control of pipes and vessels.

R Series Solution

- Available for use in safe and hazardous areas.
- Enclosures suitable for Gas Group IIA, IIB and IIC.
- Ingress Protection IP66.
- Full range of accessories and termination kits available.

INTRODUCTION


As part of our commitment to innovation in the industry, Heat Trace Ltd is offering an Exd solution.

This electronic thermostat is an adjustable temperature, single-point, ON-OFF thermostat, comprising a Pt100 sensor.

The electronic thermostat has a glass window to monitor the present temperature, set the required temperature, and monitor the heat tracing on/off status.

The electronic thermostat may be used to provide process temperature control in safe areas, or Zone 1 or 2 hazardous areas by switching the heating circuits at the desired temperatures.

The enclosure is made of high grade, cast aluminium and painted with RAL 7035 paint.

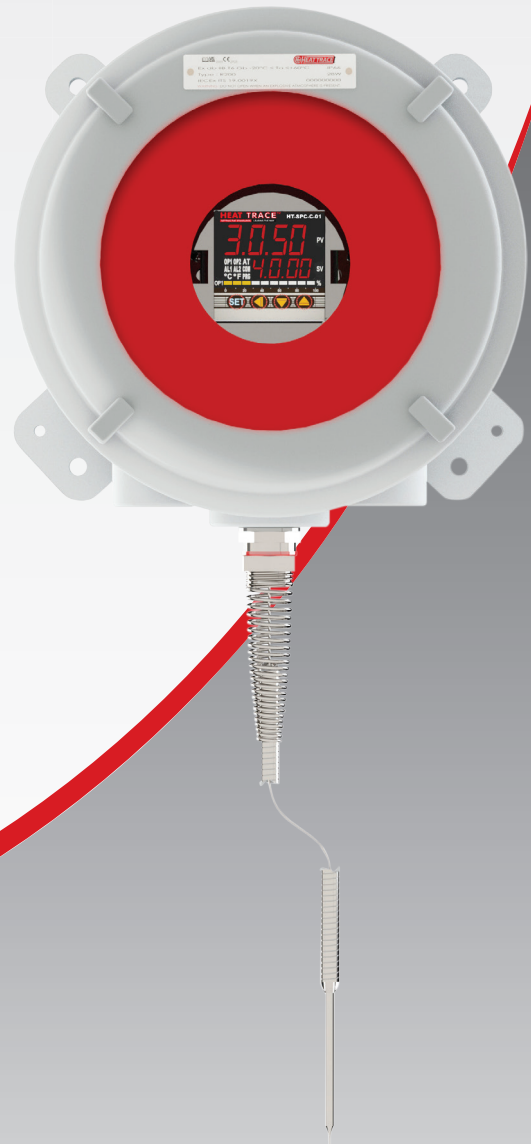

The Heat Tracing Authority™

SPECIFICATION

ENCLOSURE:

Material: Standard Copper Free Aluminium
Paint shade: RAL 7035, light grey
Protection: EX (db) - IP66
Rated voltage: 1.1kV AC / DC
Area suitability: Zone 1 / Zone 2, IIA / IIB / IIC
Cable entries: 2 off (1 off for power cable, 1 off for heat tracing cable or Control)

ELECTRONIC THERMOSTAT SPECIFICATION:

Earthing: Internal and external earthing
Sensor Type: Pt100
Temperature setting adjustment: set buttons
Sensor tube protection: Stainless steel conduit
Sensor lead length: 1.5m
Number of terminals: 6 off (2 live, 2 Neutral & 2 Earth)
Size of terminals: 6mm²
(suitable for 2.5 - 6mm² conductors)

APPROVAL DETAILS:

ATEX	-	CML 23ATEX1502X
IECEX	-	IECEX CML 23.0177X
UKCA	-	CML 23UKEX1503X

EQUIPMENT MARKING:

IECEX:
Gas: Ex db IIC T6/T5 Gb
Dust: Ex tb IIIC T85°C/T100°C Db
-60°C or -20°C <Ta< +45°C / +60°C / +75°C

ATEX/UKCA:
Gas: Ⓔ II 2 G D Ex db IIC T6/T5 Gb
Dust: Ⓔ II 2 G D Ex tb IIIC T85°C/T100°C Db
-60°C or -20°C <Ta< 45°C / +60°C / +75°C

STANDARD KIT CONTENT:

- Junction box with specified entries fitted with with temperature controller, temperature controller bracket.
- Terminal & accessories (terminal, end plate, stopper, shorting link, terminal marker where applicable).
- 2 off stainless steel earthing stud.
- O ring, grub screw, allen key for grub screw.
- Stainless steel certification plate.
- Stainless steel tag plate.
- 2 off M8x12 Stainless nut, bolt and washer set for mounting
- Cable entry marking sticker.
- External earthing stud is fitted with PVC sleeved copper lug.
- Earthing sticker
- Instruction manual
- Wiring diagram.

SAFE USE:

Only certified cable glands & accessories of required Ex protection shall be used.

Each entry shall have no more than one thread adaptor. A stopping plug shall not be used with a thread adaptor.

If holes or unused cable entry are left open, explosion protection can no longer be guaranteed.





Close open holes using stopping plugs approved for required type of protection.

ACCESSORIES:

Heat Trace Ltd supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls.

HEAT TRACING JUNCTION BOX WITH ELECTRONIC THERMOSTAT

PART NO. : R160/ETHJB

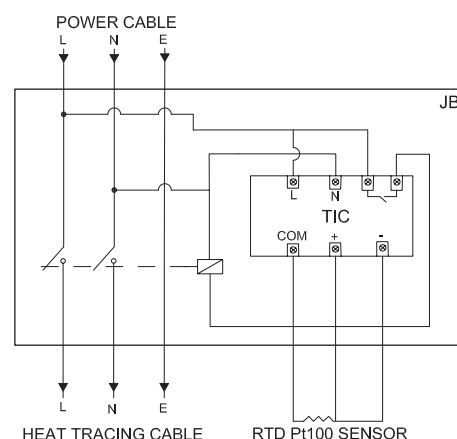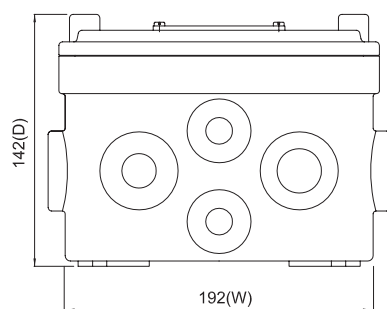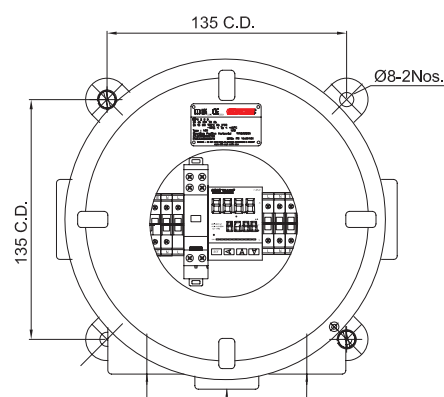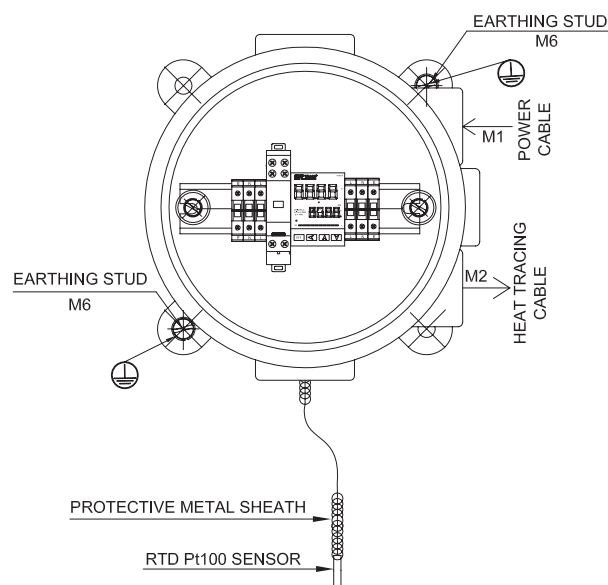

Description	Part number	Power cable size (mm ²)	Tightening torque (Nm)	Entry size for Power cable M1	Entry size for Heat tracing cable M2
Heat tracing junction box with electronic thermostat	R160/ETHJB/1W/6/A/25A	3C x 6	0.8	M20	M20

Note: 1) All dimensions are in mm with tolerance of $\pm 5\%$.
2) External earthing stud is fitted with PVC sleeved copper lug.



Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.
Tel: +44 (0)1928 726451
www.heat-trace.com Email: info@heat-trace.com

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only. Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.